



## ED2201 Specifications

|                       |   |
|-----------------------|---|
| Readability           | 0.1 g   |
| Weighing capacity     | 2,200 g   |
| Pan size              | 180x180 mm / 7 x 7 in.                                  |
| Response time (avg.)  | 1.0 sec.  |
| Dimensions - Overall: | (W x D x H):<br>230 x 303 x 90.5 mm<br>9 x 12 x 3.5 in. |
| Reproducibility       | 0.1 g   |
| Linearity             | 0.1 g   |

## Standard Features:

White backlit, high contrast display with 15 mm digits

Mechanical protection of the weigh cell when overloaded and protection of the cell against side impact to the weighing pan.

New operating concept: simple configuration of individual settings guided by short, menu-driven text prompts (choice of 5 languages) and by navigation using the cursor keys.

The most advanced microprocessor technology. More performance power for even faster and more stable readings

The level indicator is positioned in the direct vicinity of the display – this enables the user to quickly check whether the balance is correctly leveled.

Digital filter levels of the newest generation offer optimal prerequisites for adapting the balance to the conditions at the place of use.

Bidirectional RS-232C interface port, connection of the balance to a USB port by an optional Sartorius adapter cable.

ISO/GLP – compliant recording/printing of calibration, adjustment and weight values in conjunction with the optional YDP03-OCE data printer

Built-in application programs: calculation by a factor, weighing in %, net-total formulation; animal weighing; toggling up to 4 different units of measure, totalizing, count and density determination..

Ample sized stainless steel weighing pan

Total ease of operation. All keys feature positive click action. Clearly structured control panel

Automatic calibration and adjustment at the touch of a respective key – using an external weight..




Data printer

| Key accessories  | Order no.  |
|--|------------|
| Data printer with date, time and statistics functions                      | YDP03-OCE  |
| Data transfer software Software Wedge with RS-232C standard cable (1.5 m); | 72US1010.3 |

Sartorius Corporation  
131 Heartland Boulevard  
Edgewood New York 11717  
Toll Free: (800) 635-2906  
☎ (631) 254-4249  
Fax (631) 254-4261

|                          |          |
|--------------------------|----------|
| This Document Number:    |          |
| <b>Related Documents</b> | <b>#</b> |
| Applications Catalog     | 102000   |
| Laboratory Catalog       | 1000     |
| Calibration Catalog      | 80000    |
|                          |          |

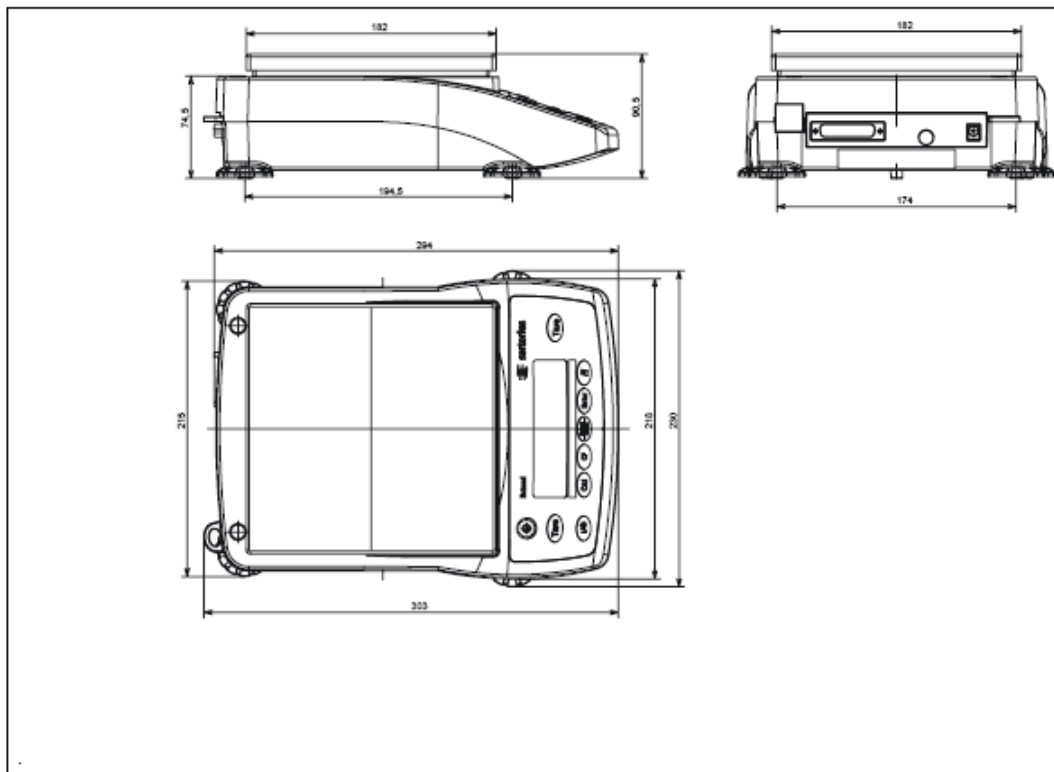

Alle Angaben in mm | All dimensions are in millimeters

|                         |  |
|-------------------------|--|
| Für Modell<br>For Model | ED6202S, ED4202S, ED3202S, ED2202S, ED8201, ED5201, ED2201,<br>ED6202S-CW, ED4202S-CW, ED3202S-CW, ED2202S-CW, ED8201-CW,<br>ED5201-CW, ED2201-CW, ED6202S-OCE, ED4202S-OCE, ED3202S-OCE,<br>ED2202S-OCE, ED8201-OCE, ED5201-OCE, ED2201-OCE |
|-------------------------|--|

Sartorius Corporation  
 131 Heartland Boulevard  
 Edgewood New York 11717  
 Toll Free: (800) 635-2906  
 ☎ (631) 254-4249  
 Fax (631) 254-4261

|                          |          |  |
|--------------------------|----------|--|
| This Document Number:    |          |  |
| <b>Related Documents</b> | <b>#</b> |  |
| Applications Catalog     | 102000   |  |
| Laboratory Catalog       | 1000     |  |
| Calibration Catalog      | 80000    |  |
|                          |          |  |