

Sartorius CUBIS® Analytical Model MSA225P-000-DU



Specifications


| | |
|---------------------------|--|
| Weighing capacity | 60/120/220 g |
| Readability | 0.01/0.02/0.05 mg. |
| Pan size | 85 x 85 mm / 3.3 x 3.3 in. |
| Response time (avg.) | 6.0 sec. |
| Weighing chamber (WxDxH): | 8 x 8 x 10.2 in.(from pan) 205 x 205 x 261 mm. |
| Repeatability | 0-60g. $\leq \pm 0.015$ mg 60-220g $\leq \pm 0.04$ mg |
| Linearity | $\leq \pm 0.15$ mg |
| Corner Load | 0.2 mg. (100 g.) |

Standard Features:


- MSA Display features a high-contrast TFT touch screen 5.7" graphic display for clear and easy viewing. Display is tilt able and control unit detachable.
- Q-Level – The first balance in its class with automatic leveling.
- Q-Pan – Off Center load compensation reduces off-center loading errors, enables Cubis to be designed with an extra-large weighing pan.
- Q-Comm – provides maximum connectivity. Three standard interface ports (RS-232, USB, Ethernet).
- Q-Guide – novel, wizard-supported User/Task Management for easiest operation – even when the most complex weighing tasks need to be performed.
- Advanced Pharma Compliance makes Cubis ideal for use in regulated areas. Alert messages and reminder functions with user-definable action hierarchy for leveling, minimum sample weight, calibration and adjustment. Fully automatic calibration and adjustment with isoCAL, GLP-compliant, user configurable printouts,
- All Data, such as user base data or tasks can easily be transferred by SD card from one Cubis to another.
- Manual analytical draft shield chamber with smooth-action doors.
- Applications include mass unit conversion, SQmin function, isoCAL function, Density determination, statistics, calculation, averaging, formulation, percent weighing, time-controlled functions, totalizing, second tare memory, counting and over/under checkweighing.

Sartorius Corporation
5 Orville Drive
Bohemia, NY 11716
Toll Free: (800) 635-2906
☎ (631) 254-4249
Fax (631) 254-4252

For 3D Demonstration Go To:
www.Sartorius.com/Cubis



Sartorius CUBIS® Series

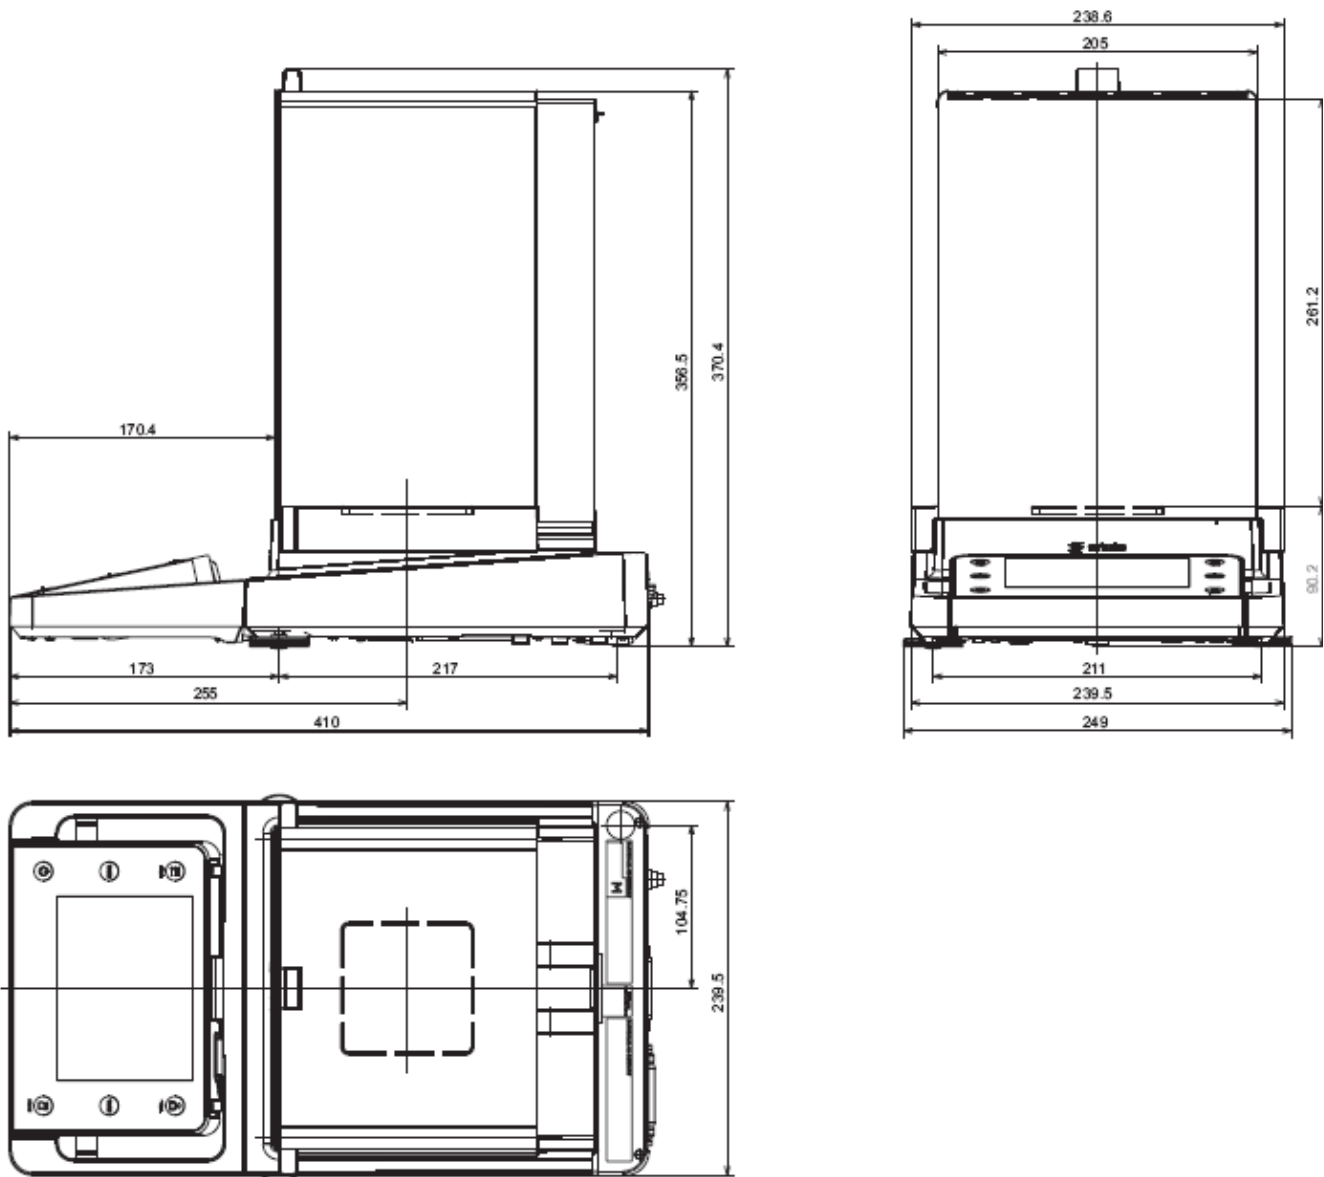

- Options:**
- DA = Automatic motorized draft shield
 - DI = Automatic motorized draft shield with integrated ionizer
 - 100(replaces 000) = Fully automatic motorized leveling feet
 - IR = Additional RS232, 25 pin connection
 - IB = Bluetooth wireless interface
 - IP = Additional RS232C, 9 pin connection with PS2 port

Sartorius Corporation
5 Orville Drive
Bohemia, NY 11716
Toll Free: (800) 635-2906
☎ (631) 254-4249
Fax (631) 254-4252

For 3D Demonstration Go To:
www.Sartorius.com/Cubis

